
Nonpoint continued

Everyone contributes to NPS pollution in one way or another. Land use such as agriculture, forestry, construction, and septic systems are all potential sources of nonpoint contaminants. Household contributors include improperly disposed pet waste, lawn fertilizer, paints, and motor oil. Automobiles, factories, and wood stoves emit airborne contaminants that return to the earth in the form of rain or snow. The amount of these contaminants that reach water sources is increased by impermeable surfaces, such as roofs and pavements, which keep the soils from naturally filtering stormwater.

The Cities of Salem and Beverly are in the process of implementing Stormwater Management Plans (SWMP) designed to reduce stormwater runoff pollution and protect your source and surface waters. Public education and participation are required control measures for the SWMP.

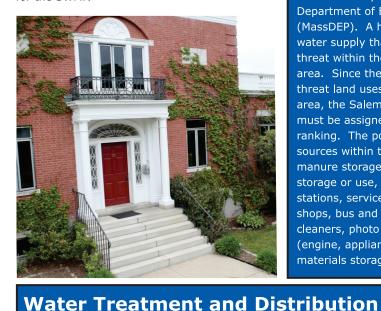

Massachusetts Source Water Assessment and Protection Program

The Source Water Assessment and Protection (SWAP) Program assesses the susceptibility of public water supplies to contamination due to land uses and activities within the recharge area of Salem and Beverly's water supply. The water supply for these towns consists of surface water from Wenham Lake (Source ID #3030001-01S), Longham Reservoir (Source ID #3030001-02S), Putnamville Reservoir (Source ID #3030001-03S) and the Ipswich River (Source ID #3030001-04S).

A susceptibility ranking of high was assigned to this system using the information collected during the assessment by the Massachusetts water supply that has at least one high threat within the water supply protection hreat land uses within the protection area, the Salem and Beverly water supply must be assigned a high susceptibility anking. The potential contaminant anure storage or spreading, pesticide stations, service stations/auto repair shops, bus and truck terminals, dry cleaners, photo processors, repair shops engine, appliance, etc.), hazardous naterials storage, machine/metalworking

shops, hazardous waste facilities, large quantity hazardous waste generators, landfills and dumps, military facilities (past and present), former NIKE sites, and underground storage tanks. This ranking does not imply that the towns have poor water quality or will have poor water quality in the future. It only draws attention to various activities within the watershed that may be potential sources of contamination.

The SWAP then assesses what the water supplier is doing to prevent contamination and recommends othe measures that can be taken to furthe protect the sources. Some source protection measures Salem and Beverly have already implemented include reviewing the development of plans in the City of Beverly and the Town of Wenham, conducting stream monitoring throughout the watersheds, and managing geese on Wenham Lake.

If you would like more information, the complete SWAP report is available at the Salem and Beverly Supply Board and online at http://www.mass.gov/eea/docs/dep/water/drinking/swap/nero/3030001.pdf. You can also call the Salem and Beverly Water Supply Board at 978-922-2600.

Salem & Beverly Water Supply Board 50 Arlington Avenue Beverly, MA 01915

PRSRT STD U.S. POSTAGE PAID MAILRITE ECRWSS

POSTAL PATRON

Source Water Potassium Permanganate Carbon Alum Pump Plump Plump


Water from the Ipswich River and the three reservoirs goes to a water filtration plant, operated 24 hours a day, 7 days a week by the Board. The plant removes naturally occurring impurities from the source water, as required by federal regulations and good public health practices, and delivers the water to pumping stations owned by the cities of Salem and Beverly. These pumping stations deliver drinking water to your home in pipes owned and maintained by each city water department.

Before water enters to pumping stations, it is tooth decay/cavities.

To improve corrosion modified existing treat additive that is designed the distribution system.

Before water enters the filtered water reservoir that precedes the pumping stations, it is fluoridated. Fluoride is added to prevent tooth decay/cavities.

To improve corrosion control in the distribution pipes, the Board modified existing treatment by switching to a new phosphate additive that is designed to optimize corrosion control throughout the distribution system and minimize dissolved lead in the pipes and household plumbing.

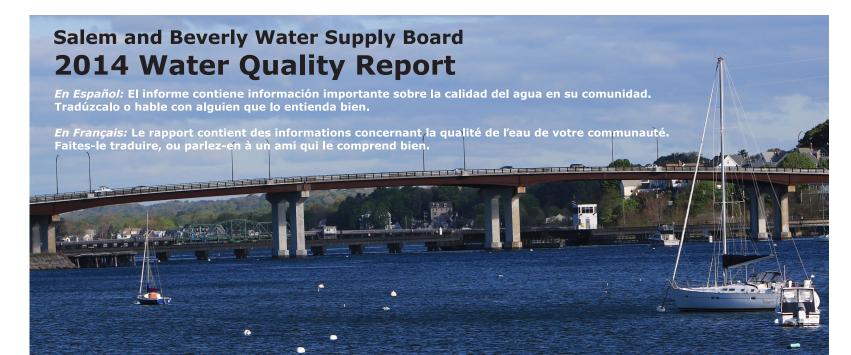

Salem and Beverly Water Supply Board

2014 Water Quality Report

Public Water Supply ID # 3030001

2014 Water Quality ReportThis report describes the Salem and

Beverly Water Supply Board's (the Board's) drinking water sources and reated water quality for 2014.

This publication is mandated by the federal public right-to-know regulation requiring community wate suppliers to provide specific treated water quality information annually to customers.

This report includes additional information beyond the minimum federal requirements as part of our ongoing commitment to increase public awareness of your drinking water and protection of this valuable resource.

For More Information...
About contaminants and potential health effects, please call the EPA's Safe Drinking Water Hotline at 800-426-4791 or visit www.epa.gov/safewater.

About the Salem and Beverly
Water Supply Board (PWS ID
#3030001) and your water
quality, please call Peter Smyrnios,
Superintendent, at 978-922-2600.
The Board meets at the Water
Filtration Plant at 50 Arlington
Avenue in Beverly. The Board usually
meets on Tuesday after the first
Monday of each month, but please
call to confirm that a meeting is
scheduled. Notices of these meetings
are posted in the Beverly and Salem
City Halls.

About your water distribution system, please contact the appropriate department in your city:


Salem Water Department (PWS ID #3258000) phone: 978-745-9595 x5673

Beverly Water Department (PWS ID #3030000) phone: 978-921-6000 x2358

Sources of Your Drinking Water

Salem and Beverly use approximately 3.5 billion gallons of drinking water per year. This water is drawn from the Ipswich River and three reservoirs: Wenham Lake Reservoir, Putnamville Reservoir and Longham Reservoir. Beverly's water mains have interconnections with Wenham, Danvers, and Manchester. Salem's water mains have interconnections with Marblehead and Peabody.

The Board recognized the practical and ecological importance of storing high winter and spring flows of the Ipswich River for use in summer when river flows are naturally low. During winter and spring, water is pumped from the Ipswich River to Putnamville Reservoir and/or Wenham Lake Reservoir for storage and use in summer. Water is not pumped from the river during summer. Similarly, Longham Reservoir augments Wenham Lake Reservoir.

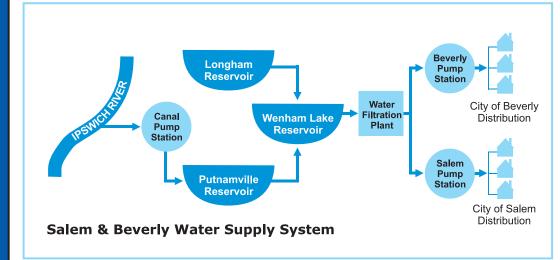

Nonpoint Source Pollution

The US Environmental Protection Agency (EPA) Phase II Stormwater regulations require all communities with populations under 100,000 to implement control measures aimed at reducing water pollution caused by stormwater runoff. Stormwater runoff is a major component of nonpoint source (NPS) pollution.

Approximately 40 percent of America's surveyed lakes, rivers, and estuaries fail to meet standards for safe fishing or swimming. According to the EPA, NPS pollution constitutes the nation's largest source of water quality problems.

NPS pollution occurs when runoff (rainwater or snowmelt) moves over the land picking up sediments and contaminants and then deposits them into lakes, rivers and coastal waters. Overland flow picks up pollutants from driveways, crops, industrial sites, or malfunctioning septic systems before discharging into the river or storm drain.

NPS pollution can lead to beach closures, fish kills, habitat destruction, and unsafe drinking water. Unlike point sources (e.g., discharge pipes from facilities), nonpoint sources are diffuse, which makes them difficult to trace and control.

Nonpoint continued on next page

Treated Water Quality Data for 2014 Listed below are 29 contaminants detected in Salem's and Beverly's drinking water in 2014. We tested for more than 100 other contaminants in 2014, but they were not detected in your water.

Samples Collected from the Water Filtration Plant (After Treatment)

Substance	Units	Highest Result Detected	Range of Detection	Highest Level Allowed (MCL)	Ideal Goal (MCLG)	Violation Y/N	Sources of Contaminant
Microbiological							
Total Organic Carbon (1)	ppm	2.83	0.97 - 2.83	π	NR	N	Naturally present in the environment
Turbidity (2) The lowest monthly percentage of samples <0.3	NTU 3 NTU was 100	0.29	0.02 - 0.29	TT = 0.3	NR	N	Soil runoff
Inorganic Chemicals							
Barium	ppm	0.025	No range, 1 sample required	2	2	N	Discharge of drilling wastes, metal refineries, erosion of natural deposits
Fluoride (3)	ppm	1.24	0.88 - 1.24	4	4	N	Water additive which promotes strong teeth, erosion of natural deposits
Nitrate	ppm	0.11	No range, 1 sample required	10	10	N	Runoff from fertilizer use, leaching from septic tanks, sewage, erosion of natural deposits
Sodium (4)	ppm	46.8	No range, 1 sample required	NR	NR	N	Natural sources; runoff from use of salt on roadways; by-product of treatment process
Radionuclides							
Gross Alpha (5)	pCi/L	0.86	No range, 1 sample required	15	0	N	Erosion of natural deposits
Radium(6) (226 & 228 combined)	pCi/L	0.60	No range, 1 sample required	5	0	N	Erosion of natural deposits

Unregulated Contaminants - Unregulated contaminants are those for which there are no established drinking water standards. The purpose of unregulated contaminant monitoring is to assist regulatory agencies in determining their occurrence in drinking water and whether future regulation is warranted.

Secondary Contaminant	Units	Highest Result Detected	Range of Detection	SMCL	Sources of Contaminant
Aluminum	ppb	55	No range, 1 sample required	200	Byproduct of treatment process
Calcium	ppm	24.1	No range, 1 sample required	NR	Naturally present in the environment
Chloride	ppm	92.8	No range, 1 sample required	250	Runoff from road de-icing, use of inorganic fertilizers, landfill leachates, septic tank effluents, animal feeds, industrial effluents
Magnesium	ppm	4.82	No range, 1 sample required	NR	Naturally present in the environment
Manganese	ppm	0.01	ND - 0.01	0.05	Erosion of natural deposits
Potassium	ppm	2.33	No range, 1 sample required	NR	Naturally present in the environment
Sulfate	ppm	27.4	No range, 1 sample required	250	Naturally present in the environment
Substance	Units	Highest Result Detected	Minimum Reporting Level (MRL)	Sources o	of Contaminant

By-product of chlorination

By-product of chlorination

Dibromo	chloro	methane	ppb		2.7		0.05

16

9.9

Trihalomethanes

Bromodichloromethane

Dibromochloromethane	ppb	2.7	0.05	By-product of chlorination			
Unregulated Contam	inant Monito	oring Rule (UCN	4R-3)				
Chromium	ppb	0.3	0.2	Erosion of natural deposits			
Strontium	ppb	100	0.3	Naturally-occurring element, fertilizer			
Vanadium	ppb	0.7	0.2	Naturally-occurring element, fossil fuel, food			
Chromium-6	ppb	0.12	0.03	Naturally-occurring element, industrial activities			
Chlorate	ppb	470	20	By-product of chlorination, herbicide			

0.05

0.05

Samples Collected from the Distribution System

Substance	Area	Units	90th Percentile	Range of Detection	Action Level		nples that Action Level	Ideal Goals (MCLG)	Lead & Copper (Possible Source of Contamination)		
Copper (7)	Salem	ppm	0.1943	0.0206 - 0.700	08 1.3		0	1.3	Corrosion of household plumbing systems;		
	Beverly	ppm	0.1584	0.0176 - 0.198	31 1.3		0	1.3	erosion of natural deposits; leaching from		
	Both	ppm	0.1769	0.0176 - 0.700	08 1.3		0	1.3	wood preservations		
Lead (7)	Salem	ppb	3.5	ND - 450.1	15		0	0	Corrosion of household plumbing systems,		
	Beverly	ppb	2.0	ND - 5.0	15		0	0	erosion of natural deposits		
	Both	ppb	3.3	ND - 450.1	15		0	0			
Substance		Units	Highest R	ge Results or Running Annual ge Detected	Range of Detection	Highest Level Allowed (MCL		al Violation (Y/N)	Sources of Contaminant		
Disinfection	n Contamina	ants									
Haloacetic Acid	ds	ppb	3	30.0 (9)	ND - 47.3 (10)	60 (11)	NR	N	By-product of drinking water chlorination		
Total Trihalom	ethanes (8)	ppb	5	55.8 (9)	28.1 - 99.1 (10)	80 (11)	NR	N	By-product of drinking water chlorination		
Chlorine (total)	ppm		1.40	0.79 - 2.14	4 (MRDL)	4 (MRDLG	i) N	Water additive used to control microbes		
Substance		Units	Highest %		l # Positive	Highest Level Allowed (MCL)	Ideal Goal (MCLG)	Violation (Y/N)	Sources of Contaminant		
Microbiolog	ical										
Total Coliform	Bacteria	_	0%	6 0 in 1	,403 samples	5%	0	N	Naturally present in the environment		

Notes:

- (1) Finished water TOC compliance is determined in accordance with the requirements of 310 CMR 22.07E(6)(e)4a. TOC levels for 2014 were in
- (2) Turbidity is a measure of the cloudiness of the water. Turbidity is monitored because it is a good indicator of water quality and the effectiveness of filtration. 95% of monthly samples of filtered water leaving the treatment plant must be <0.3 NTU and no samples can exceed 1 NTU.
- Fluoride also has a SMCL of 2.0 ppm.
- (4) The MassDEP Office of Research and Standards has set a guideline concentration of 20 ppm for sodium. Sodium-sensitive individuals, such as those experiencing hypertension, kidney failure, or congestive heart disease, should be aware of the sodium levels if exposures are being carefully
- (5) Gross alpha testing was performed in 2014.
- (6) Because past monitoring results for radium have been extremely low, the Board is now on a reduced monitoring interval. Radium testing was
- (7) See lead and copper compliance monitoring sections below for details on lead and copper sampling.
- (8) Some people who drink water containing trihalomethanes in excess of the MCL over many years may experience problems with their livers, kidneys, or central nervous systems. They may have a greater statistical risk of getting cancer.
- Highest level detected is based on the locational running annual average (LRAA).
- (10) The range of detection is based on the samples collected quarterly at each sampling site and is not an average.
- (11) The highest level allowed (MCL) for total trihalomethanes and haloacetic acids is based on the locational running annual average (LRAA) of four

Lead and Copper Compliance Monitoring

There is no lead in the water that enters the distribution system. Lead enters the drinking water through the corrosion of household plumbing. Lead in tap water is controlled by adding corrosion inhibiting chemicals to the water supply during the treatment process.

Since the Board began implementing a new blended phosphate corrosion control treatment in 2004, frequent monitoring of lead and copper levels has been continuing in the distribution system. This monitoring examines the progress of the corrosion control treatment process and will continue. These are now optimized in accordance with the Lead and Copper Rule. The Board is on a 3-year monitoring schedule. The most recent round of monitoring was completed in 2014; the results can be found in the table on the previous page and described in the paragraph below.

Important Health Information

Some people may be more vulnerable to contaminants in drinking water than people in the general population. Immuno-compromised persons such as those with cancer undergoing chemotherapy, persons who have undergone organ transplants, those with HIV/AIDS or other immune system disorders, elderly persons, and infants can be particularly at risk from infections. These people should seek advice about drinking water from their health care providers. EPA/Centers for Disease Control and Prevention (CDC) guidelines on appropriate means to lessen the risk of infection by Cryptosporidium and other microbial contaminants are also available from the EPA's Safe Drinking Water Hotline at 800-426-4791.

Lead and Copper

Copper is an essential nutrient, but some people who drink water containing copper in excess of the action level over a relatively short amount of time could experience gastrointestinal distress. Some people who drink water containing copper in excess of the action level over many years could suffer liver or kidney damage. People with Wilson's Disease should consult their doctor.

If present, elevated levels of lead can cause serious health problems, especially for pregnant women and young children. Lead in drinking water is primarily from materials and components associated with service lines and home plumbing. The Board is responsible for providing high quality drinking water, but cannot control the variety of materials used in plumbing components. When your water has been sitting for several hours, you can minimize the potential for lead exposure by flushing your tap for 30 seconds to 2 minutes before using water for drinking or cooking. If you are concerned about lead in your drinking water, you may wish to have your water tested. Information on lead in drinking water, testing, methods, and steps you can take to minimize exposure is available from the Safe Drinking Water Hotline or at http://www.epa.gov/safewater/lead.

Definitions

Action Level (AL) – The concentration of a contaminant which if exceeded triggers a treatment or other requirements that a water system

MCL (Maximum Contaminant Level) - The highest level of a contaminant that is allowed in drinking water. MCLs are set as close to the MCLGs as feasible using the best available treatment technology.

MCLG (Maximum Contaminant Level Goal) - The level of a contaminant in drinking water below which there is no known or expected risk to health. MCLGs allow for a margin of safety.

MRDL (Maximum Residual Disinfectant Level) – The highest level of a disinfectant (chlorine, chloramines, chlorine dioxide) allowed in drinking water. There is convincing evidence that addition of a disinfectant is necessary for control of microbial contaminants.

MRDLG (Maximum Residual Disinfectant Level Goal) - The highest level of a disinfectant (chlorine, chloramines, chlorine dioxide) below which there is no known or expected risk to health. MRDLGs do not reflect the benefits of the use of disinfection to control microbial contaminants.

mrem/yr (millirems per year) – a measure of radiation absorbed by the body.

MRL - Minimum Reporting Level.

NR (Not Regulated) - Unregulated contaminants are those for which EPA has not established drinking water standards. The purpose of unregulated contaminant monitoring is to assist EPA in determining their occurrence in drinking water and whether future regulation is

NTU (Nephelometric Turbidity Units) – A measure of the suspended material in water.

pCi/L (picoCuries/liter) - A measure of the radioactivity in water.

ppb – Parts per billion, or micrograms per liter (μg/L). One ppb is equivalent to \$1 in \$1,000,000,000.

ppm – Parts per million, or milligrams per liter (mg/L). One ppm is equivalent to \$1 in \$1,000,000.

SMCL (Secondary Maximum Containment Level) - These standards are developed to protect the aesthetic qaulities of drinking water and

TT (Treatment Technique) - A required process intended to reduce the level of a contaminant in drinking water.

90th percentile - Out of every 10 homes sampled, 9 were at or below this level.

N/A - Not applicable. ND - Not detected

Substances Found in Drinking Water

Sources of drinking water (both tap water and bottled water) include rivers, lakes, streams, ponds, reservoirs, springs, and wells. As water travels over the surface of the land or through the ground, it dissolves naturally-occurring minerals and, in some cases, radioactive material. It can also pick up substances resulting from the presence of animals or from human activity. Contaminants that may be present in source water include:

- **Microbial contaminants**, such as viruses and bacteria, which may come from sewage treatment plants, septic systems, agricultural livestock operations, and wildlife.
- Inorganic contaminants, such as salt and metals, which can be naturally-occurring or result from urban stormwater runoff, industrial, or domestic wastewater discharges, oil and gas production, mining, and farming.
- **Pesticides and herbicides**, which may come from a variety of sources such as agriculture, urban stormwater runoff, and residential uses.
- Organic chemical contaminants including synthetic and volatile organic chemicals, which are by-products of industrial

processes and petroleum production, and can also come from gas stations, urban stormwater runoff, and septic

Radioactive contaminants, which can be naturallyoccurring or be the result of oil and gas production and mining activities.

In order to ensure that tap water is safe to drink, the MassDEP and EPA prescribe regulations that limit the amount of certain contaminants in the water provided by public water systems. The Food and Drug Administration (FDA) and the Massachusetts Department of Public Health (DPH) regulations establish limits for contaminants in bottled water that must provide the same protection for public health. All drinking water, including bottled water, may reasonably be expected to contain detectable amounts of some contaminants. The presence of contaminants does not necessarily indicate that the water poses a health risk. More information about contaminants and potential health effects can be obtained by calling the EPA's Safe Drinking Water Hotline at 800-426-4791.

Compliance with Health and Safety Standards

The Board is committed to providing drinking water that meets or surpasses all primary and secondary health and safety standards. State and federal regulators routinely monitor our compliance and testing protocols to ensure that we deliver safe drinking water to customers. Laboratory staff at our water filtration plant conduct more than 38,000 water-quality tests on your drinking water every year.

Water Conservation - Saving Water Saves Money!

ACTIVITY	AVERAGE USE	TRY THIS CONSERVATION TIP
Showering	20 - 40 gallons (5 gal/min)	Take a shorter shower. Save 5 gallons/minute of shower. Replace shower heads with low flow models.
Toilet Flushing	6 gallons	Replace older toilets with 1.6 gal/flush models. Don't use the toilet as a wastebasket. Fix toilet leaks. Often leaks are slow and unnoticeable. Check for leaks by placing a few drops of food coloring in the tank. Wait for at least 2 hours and see if the colored water appears in the bowl.
Personal Care	2 gallons (tap running)	Turn water off when shaving and brushing teeth. Install a flip aerator to save 35 gallons water/week/person.
Dishwater	15 gallons (full cycle)	Run only full loads. This can save 30 gallons of water/week. Replace older appliances with low water models.
Clothes Washer	36 - 60 gallons (full cycle)	Replace older appliances with new low water use, energy efficient models. Front loading machines can use 15 gal/load and can also save on hot water heating and drying time.
Outdoor Watering	5-10 gal / minute	Water in early morning or evening when evaporation is lowest. Install drip irrigation systems which use 30-50% less water. Mulch around plants to reduce evaporation and discourage weeds. Use native and drought tolerant plants in your landscaping. Minimize grass areas. Use a rain gauge to determine how much water your yard has received. One inch of

water/week is sufficient.